SANSUI BA-100 SPECIFICATIONS

DC BIAS CURRENT

25±1mA

CONTINUOUS POWER

4Ω	32W	11.3V
8Ω	24W	13.9V

GAIN AND INPUT LEVEL(8Ω)

INPUT TERMINAL	GAIN	INPUT
INPUT	26.9±2.0dB	700mV

MEMO

www.hifiengine.com

SANSUI BA-100 SCHEMATIC DIAGRAM
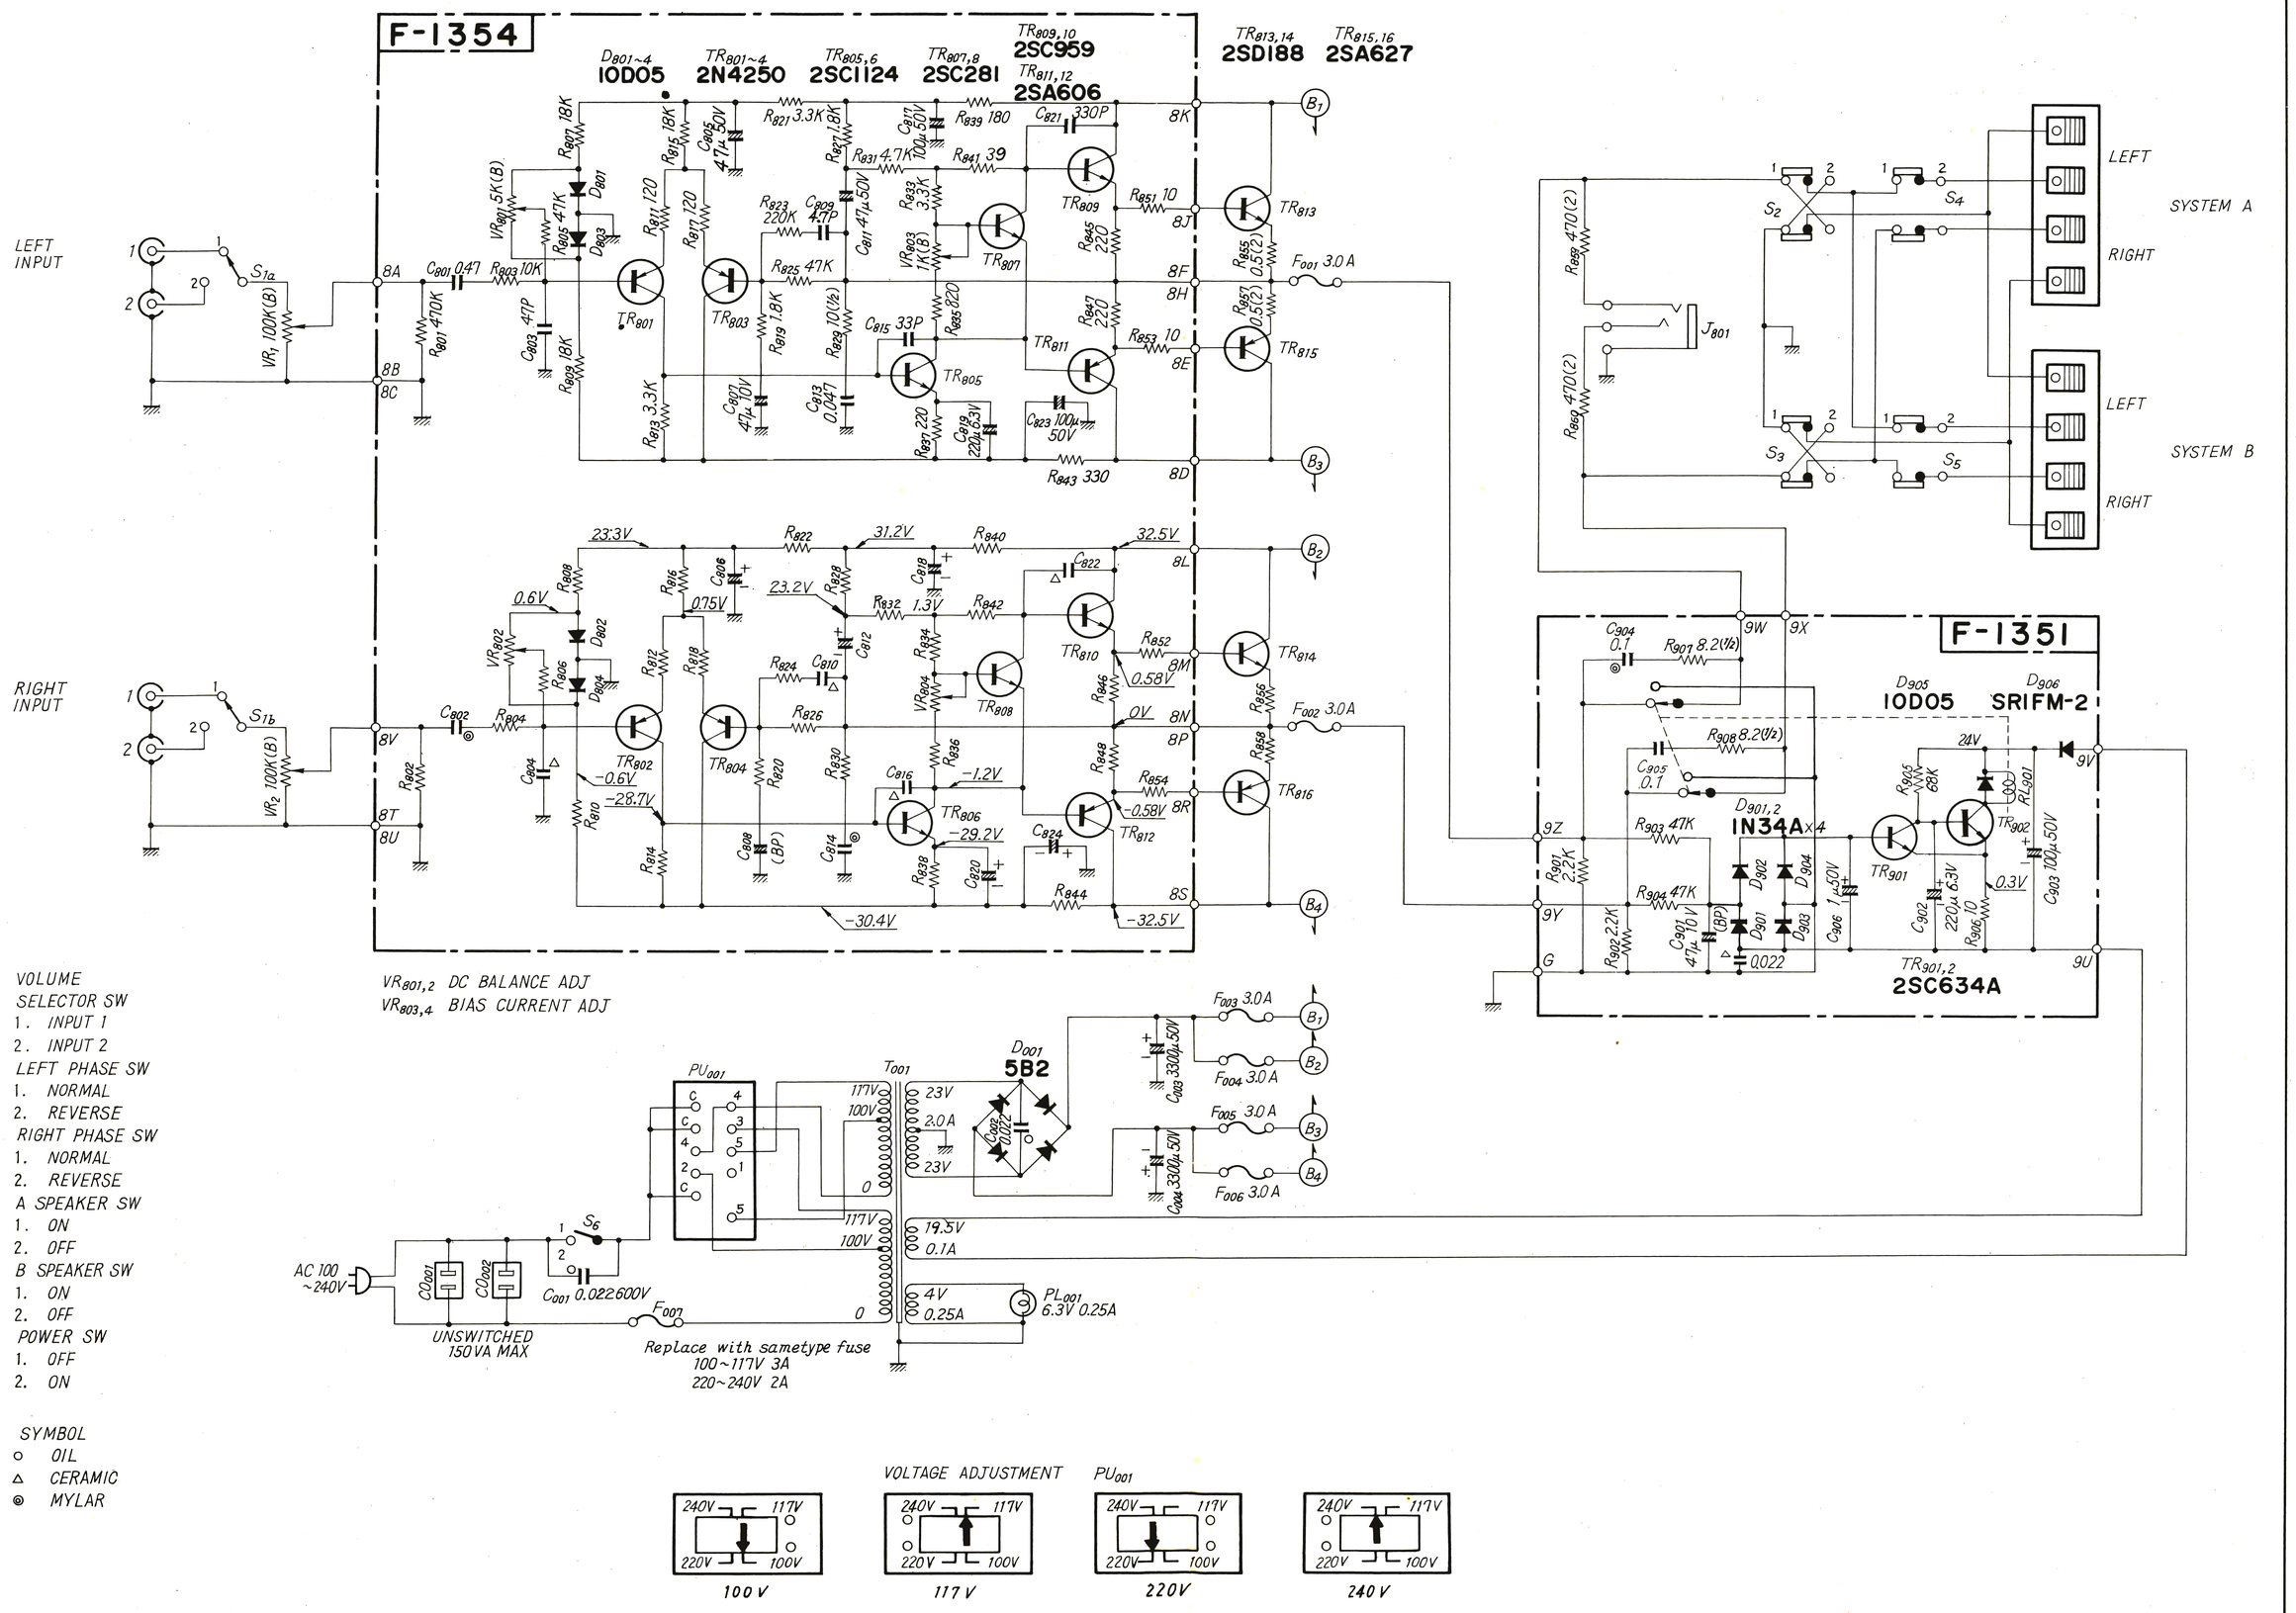
Sansui